

# Network Video Recorder




## Key Features

- 4/8-channel input
- Third-party IP cameras supported with ONVIF conformance
- HDMI and VGA output up to 1080P
- Up to 4 Megapixels resolution recording
- Accurate retrieval, instant playback
- 1 SATA HDD up to 6 TB
- Plug & Play with 4/8 independent PoE network interfaces
- Support for P2P, UPnP, NTP, DHCP, PPPoE
- Support for mobile client access


## Specifications

	BE-9104P NU	BE-9108P NU
<b>Video and Audio</b>		
IP Video Input	4-ch	8-ch
Two-way audio Input	1-ch,RCA	
<b>Network</b>		
Incoming bandwidth	40Mbps	80Mbps
Outgoing bandwidth	96Mbps	
Remote connection	128	
<b>Video/Audio Output</b>		
HDMI/VGA Output	HDMI/VGA: 1920x1080p /60Hz,1920x1080p /50Hz,1600x1200/60Hz,1280x1024/60Hz,1280x720/60Hz,1024x768/60Hz	
Recording Resolution	4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Audio Output	1-ch,RCA	
Synchronous Playback	4-ch	
<b>Decoding</b>		
Compression	H.264	
Live view/Playback	4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Capability	2 x 4MP@20, 4 x 1080p@30	2 x 4MP@20,4 x 1080p@25, 8 x 720p@25
<b>Hard Disk</b>		
SATA	1 SATA interface	
Capacity	up to 6TB for each disk	
<b>External Interface</b>		
Network Interface	1 RJ-45 10M/100M/1000Mself-adaptive Ethernet Interface	
Network Function	HTTP, TCP/IP, IPV4, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS,IP Filter, PPPOE, DDNS, FTP, IP Server, P2P	
USB Interface	Rear panel: 1 x USB2.0, 1 x USB3.0	
<b>PoE</b>		
Interface	4 independent 100 Mbps PoEnetwork interfaces	8 independent 100 Mbps PoEnetwork interfaces
Supported Standard	IEEE 802.3at	
<b>General</b>		
Power Supply	48V DC	52V DC
Consumption ( without HDD and PoE )	≤8 W	
Working Temperature	-10°C ~ + 55°C ( +14°F ~ +131°F )	
Working Humidity	10% ~ 90%	
Dimensions	44 × 360 × 254mm ( 1.7" × 14.2" × 10.0" )	
Weight ( without HDD )	≤1.42 Kg ( 3.13 lb )	

## Dimensions

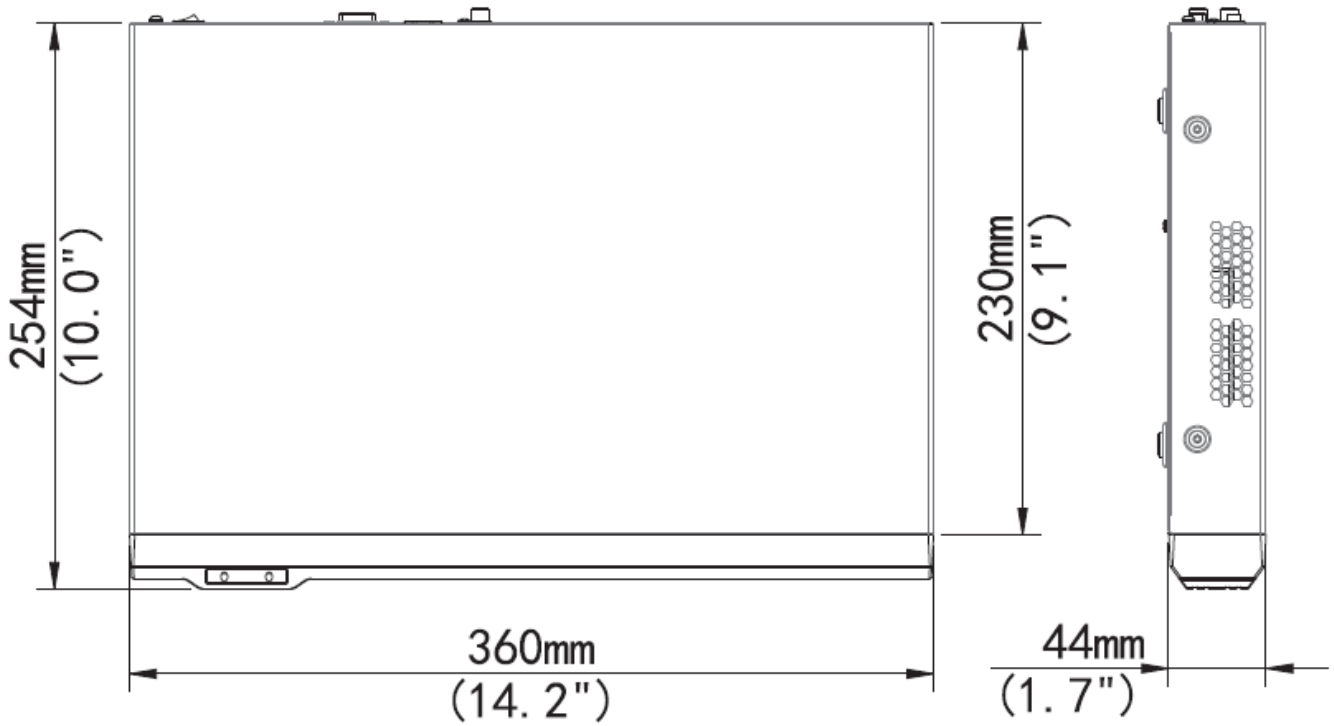

## Rear Panel

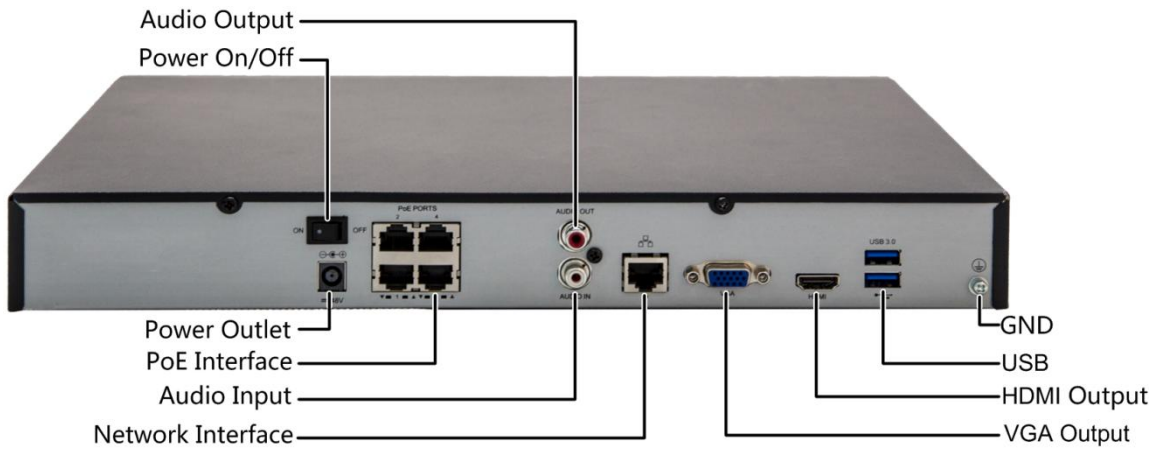

NVR201-04EP

